





On/off and level switch button




NOTE

LOW BATTERY INDICATOR : Burn times are based on use with a 1.5V Alkaline battery. Burn times may vary with use of different manufacturer's batteries. If light is flickering in Constant Mode, the battery has drained, replace with a new battery.

BATTERY SETUP

AA Battery 1.5V (1 piece)

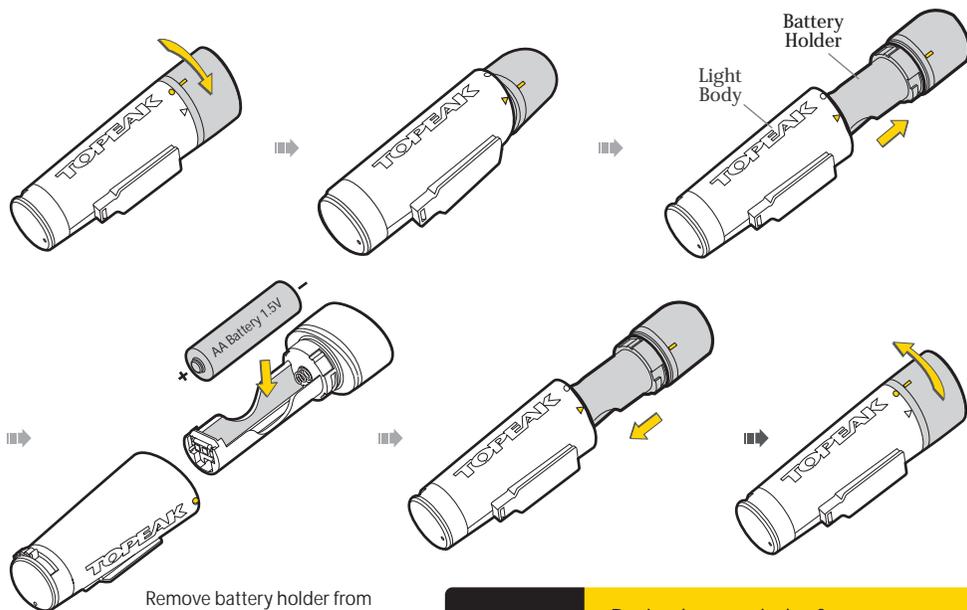


Remove battery holder from light body and insert new battery. Make sure positive and negative ends of battery is installed correctly.

WARNING

During long periods of non-use, remove batteries to prevent damage caused by leaking battery cells.

BURN TIME




Mode	Power Level	Burn Time
1	0.5W	15 hours
2	Blinking	30 hours


Note: Burn times are based on use with 1.5V Alkaline batteries.

INSTALLATION


ø26mm Bracket for normal size (ø22.2-ø26mm) handlebar




ø31.8mm Bracket for oversize handlebar



ANGLE TOE-IN ADJUSTMENT

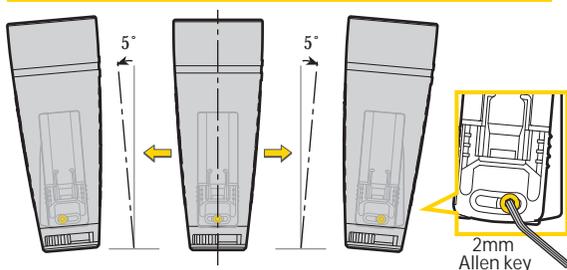


LIGHT REMOVAL

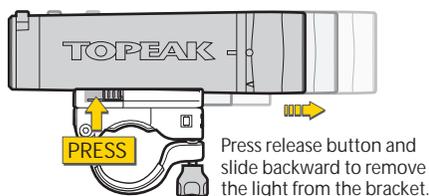

SAFETY NOTES

1. WhiteLite HP Focus is water-resistant. This allows its use in rain, however, WhiteLite HP Focus should never be purposely submerged in water.
2. If the light body or parts become dirty or have been exposed to salt water, gently clean with soft towel using mild soap and water only. Lubricate and maintain the light body with silicon based grease on the O-rings. Never use harsh chemicals to clean the lighting system as damage to the housing and lens will occur.
3. Safely and properly dispose of the old batteries according to your local regulations.
4. Never place this lighting system within a child's reach.
5. For ultimate safety, the WhiteLite HP Focus should be used in conjunction with a specific night riding light.
6. In addition to its brightness, the beam is widely diffused. In case you need to use this light on public roads, be sure to adjust the angle downward so as not to blind oncoming traffic.

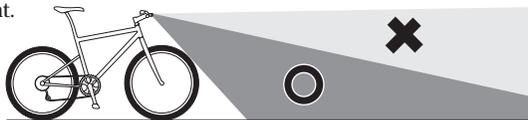

SPECIFICATIONS

Function: 0.5W and blinking
 Bulb: 0.5W LED
 Burn Time (approx):
 AA Alkaline Battery 1.5V (1 piece)
 (Standard equipped)
 0.5W - 15 hours (constant use)
 Blinking - 30 hours (constant use)
 Operating Temperature: -20°C ~ 45°C (-4°F ~ 113°F)
 Storage Temperature: -20°C ~ 60°C (-4°F ~ 140°F)
 Weight: 45 grams (Light only)



WARRANTY

1-year Warranty: All mechanical components against manufacturer defects only. Batteries are not covered under any implied warranty. Warranty Claim Requirements
 To obtain warranty service, you must have your original sales receipt. Items returned without a sales receipt will assume that the warranty begins on the date of manufacture. All warranties will be void if the product is damaged due to user crash, abuse, system alteration, modification, or used in any way not intended as described in this manual.

* The specifications and design are subject to change without notice.

Please contact your Topeak dealer with any questions.

For USA customer service call: 1-800-250-3068

www.topeak.com